Elara · review prototypes · 22 Oct 2026

Explorar and Círculos, made of Elara's own materials

The owner said: "try and make them somehow less claude like". The audit found where they looked AI-made. The revision then swapped those parts for the app's real materials:


- the paper grain and header paper;
- the Ionicons and the paper orb;
- the life-area art;
- production's torn slips and section links.

It also made the owner's refinements: a thin band in both tabs, scannable conversations, the composer text first, and review annotations behind one switch.

In this document

1. The audit: what read as AI-default, with crops.
2. Same app: both first screens, before and after.
3. Before and after per screen at 390 and 320 px, with normal and large text: Explorar overview, Mis círculos, Descubrir (first visit), a circle feed and the composer.
4. The shared tokens and components.
5. The real assets used, and where.
6. Checks, the logo-removed test, remaining weaknesses, and the handoff items now out of date.

Every screen image is a browser render (headless Chromium) of the prototypes, not phone evidence. Sample data. Nothing in production changed, and nothing was committed or published.

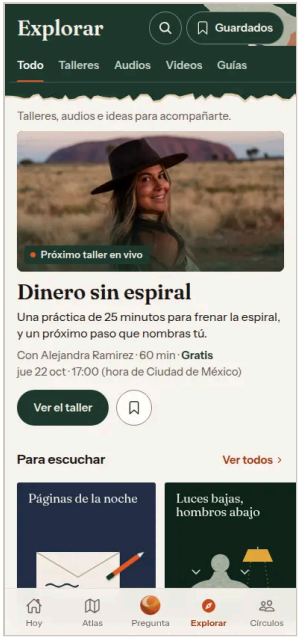





What makes Explorar and Círculos look AI-made (audit, 22 Oct 2026)

The owner looked at the unified prototypes and said: "try and make them somehow less claude like". This is the audit made before any change. It covers the shared system v1 as it stood:

- Explorar: `explore-refined-2026-10-21/v3-before-authored/artifact/`
- Círculos: `circles-review-2026-10-22/v3-before-authored/artifact/`

How it was made

- Both were rendered at 390 × 844 in headless Chromium.
  - Explorar: the overview, Talleres, Guías, the workshop detail, the audio detail and search («noche»).
  - Círculos: Mis círculos, Descubrir (also on the first visit), a circle feed (Trabajo y propósito), a post and the composer.
- The full captures are in `scratchpad/auth/before/`. The crops below are in `_shared/captures/tells/` (390 px wide, 1×).
- Each element was checked against three references:
  - **brand guidelines:** `Elara-Brand-Guidelines.pdf` (Oct 2026: palette, type, paper language, icons, do and don't), plus `deliverables/brand/identity-directions-2026-10-14/` and `deliverables/brand/svg-kit/`;
  - **production code:** `/home/user/elara/apps/mobile/src` (`TabBar.tsx`, `Icon.tsx`, `system/TornPaper.tsx`, `system/SectionHeading.tsx`, `circles/AnswerSlip.tsx`, `circles/tokens.ts`) and `packages/tokens` (`scale.ts`, `colors.ts`);
  - **real art:** `/home/user/elara/apps/mobile/assets/images/`.

The short answer. The palette is not the problem: cream, forest and ember are Elara's own, as set in the guidelines and `colors.ts`. The generic look comes from how they were used:


- everything is flat, with no paper;
- every block is the same bordered card;
- the icons, medallions and accent colours were drawn by an AI instead of taken from the app;
- the type has no scale contrast;
- the posts use the standard social-feed template.

The guidelines describe a product that is "made of paper: torn, layered, a little imperfect". The prototypes showed a cream UI kit.

The audit: crops (before)



T1 flat palette · `t01-flat-band-ex`



T2 CSS orb, T3 stand-in tabs · `t02-css-orb-tabbar`



T3 stand-in icons · `t03-standin-icons-ci`




T4 medallions, T5 left edge, T8 underline · `t04-medallions-shorts`




T4, T5 top edge, T6 cards · `t04-medallions-desc`



T5 amber bars · `t05-accent-bars-guides`



T7 check in chip · `t07-check-chips`




T7, T10 dashed chips · `t07-check-chips-ci`



T9 uppercase facts · `t09-uppercase-facts`




T9 eyebrow · `t09-uppercase-eyebrow`



T10 dashed note, T13 · `t10-dashed-demo`



T12 feed template, T15, T13 · `t12-feed-template`



T13 stand-in tag · `t13-reviewer-chrome`



T14 watermark header · `t14-watermark-header`



T16 badge · `t16-new-badge`



T17 blurred shadow · `t18-blur-shadow`

The tells

#	Tell	Where (crop)	Why it reads as AI-default	Elara's own answer
T1	**Palette cluster, used flat.** A cream page, a Fraunces display, a forest band and an ember underline, all as flat CSS fills.	`t01-flat-band-ex`, `t01-flat-band-ci`	Cream with a serif and a warm accent is the most recognisable generated look. Here the colours are the brand's own, so they stay. What is missing is the material: the guidelines say "every surface that feels personal is a piece of paper: torn edges with a slight jitter, layered sheets, soft stacked shadows". Only the torn edge was paper.	Keep the palette. The band gets the app's real paper grain (cut from `daily-path-paper-stone-v1.png`), and the torn edge becomes two layered sheets. Words sit on torn paper slips, following production's `TornPaper` rule.
T2	**A CSS gradient orb** for Pregunta in the tab bar (radial gradient, peach to terracotta).	`t02-css-orb-tabbar`	It is gradients-as-art. The guidelines say the orb is "a layered paper sun, never flat… never recolored". Production's `TabBar.tsx` uses the real `ask-elara-paper-orb-v1.png` at 28 pt.	The real paper orb, cut to a small webp.
T3	**Hand-drawn stand-in icons**: 1.6-stroke SVGs for the tabs, back, search, save, reply, camera, settings, rules, more and send.	`t03-standin-icons-ci`, `t03-standin-icons-ex`	They come from the svg-kit proposal ("this set is a proposal and is not wired into the app") or were drawn for the prototype. They have the even-stroke, rounded look of every generated icon set. The guidelines say: "a single outline set (Ionicons) at 20–22pt in warm grey, filled and ember when active".	The real Ionicons glyphs (outlines from `@expo/vector-icons` `Ionicons.ttf`), each one the glyph `Icon.tsx` maps for the production screen.
T4	**Per-circle "symbols":** small flat medallions (coins, folded heart, steps, star, leaf, house, book, ring, moon, signpost, cup) in 11 pastel tints, with 11 accent inks.	`t04-medallions-shorts`, `t04-medallions-desc`	Drawn by an AI for the prototype: flat, iconic, evenly weighted. Eleven accents break the guidelines' "two hues and warm neutrals… no cool greys, no third accent". The tints include blue, lilac and grey-blue. Meanwhile the app has a real cut-paper illustration for every life area.	The six life-area circles use a crop of their area's real path art (`path-area-*-v1.png`). The five stage circles use production's circle papers (`circles/tokens.ts` `PAPER_TINT`) with the paper grain and a Fraunces initial, not a picture. No accent inks.
T5	**Coloured accent edges**: a 4 px left border on the circle shortcuts, a 4 px top border on the Descubrir cards, an amber 3 px bar on every guide row.	`t05-accent-bars-guides`, `t04-medallions-*`	The coloured edge on a card is a stock generated-UI device. It decorates without saying anything.	Removed. Identity comes from the art and the paper. Guide rows are plain rows, as the guidelines ask.
T6	**Everything is a bordered card**: post cards, circle cards, shortcuts, the composer's place card, the price box and «Continuar escuchando». They share one radius (8), one border (#D6CBBC) and one padding (16).	`t06-card-everything`	The guidelines' don't list says: "Turn every row into a card". Their in-app rule: "the paper pieces appear where it is personal; everything else stays calm" and "lists and settings stay plain rows".	The Descubrir cards and the shortcuts become rows. The place card becomes a ruled block. Conversations become torn slips (paper, because they are words). Only the price box and «Continuar escuchando» stay cards: each is one separate object you act on. Radius varies by role.
T7	**A check mark inside the selected chip** (search format, Descubrir, section filters, composer section).	`t07-check-chips`, `t07-check-chips-ci`	Forest fill and 600 weight already mark the selection. The check is the stock "selected chip" garnish of generated UIs.	No check. Selected is a forest fill with cream 600 text, and `aria-pressed` or `aria-checked` stays.
T8	**Underlined links repeated everywhere**: «Ver todos», «Descubrir más círculos», «Editar», each underlined at the right of a heading.	`t08-underline-links`, `t08-underline-links-ex`	In production, `UnderlineLink` is for second actions only ("Type instead"). A section's action is `SectionHeading`'s link: label weight with a small chevron. The repeated underline reads as a template's "link style".	`SectionHeading`'s link: terracotta text (#A13A12, 6.18:1) with Ionicons `chevron-forward`, no underline.

#	Tell	Where (crop)	Why it reads as AI-default	Elara's own answer
T9	**Uppercase for unrelated jobs**: «TALLER EN VIVO POR VIDEO», «AUDIO · ANTES DE DORMIR», the fact labels (DURACIÓN, AUTORÍA, VOZ, ACCESO, CUÁNDO, GRUPO), «OCT» in the date tiles, «GRABACIÓN DE MUESTRA», and the orange «TAB BAR: STAND-IN» tag.	`t09-uppercase-facts`, `t09-uppercase-eyebrow`	Tracked caps were used as a generic texture: on labels, months, placeholders and reviewer tags. Production has exactly one uppercase role, the eyebrow, and the guidelines show it as a **paper label** on section heads ("section headers only, never rows").	Uppercase is kept for one role only: the paper label on section heads (production `SectionHeading` and the guidelines' paper label). Fact labels, months and placeholders are sentence case. Detail screens open with the paper label instead of a coloured eyebrow.
T10	**Dashed boxes**: the «Reproducción simulada» note, the «Sin video todavía» tile, dashed «quiet» section chips, the dashed «Añadir una foto» button.	`t10-dashed-demo`, `t10-dashed-chips`	A dashed border is the generated placeholder for "something goes here". In a product it reads as unfinished.	The simulated notes become a quiet line with Ionicons `information-circle-outline`. The missing recording is a paper tile. Quiet sections keep a solid chip edge (3:1) and use metadata ink. «Añadir una foto» becomes a text action with `images-outline`.
T11	**Flat, evenly spaced rhythm.** The section headings are all Instrument 600 18/24 (Para escuchar, Próximos talleres, Tus círculos, Conversaciones recientes, Sugeridos para ti, Todos los círculos), with item titles at 16–17/600 and 16 px margins everywhere. Sizes run 13, 15, 16, 17, 18, 19, 22, 28 and 32.	`t11-flat-headings`	No step is far enough from the next to make a hierarchy, so everything reads at one level. Production's scale is four sizes: 28 title, 21 hero, 15 body and label, 12 detail and eyebrow. The layout uses 24 pt margins and 20–32 between blocks.	Production's scale: tracked 12 labels against 21 and 28 Fraunces, and dates and numerals set large in Fraunces. Margins are 24 (16 under 340 px, as Círculos' `gutter()`), with 32 between sections.
T12	**The social-feed post template**: avatar and name on top, a bold lead, the body, the photo, then a ruled footer with a speech-bubble «Responder» and the count.	`t12-feed-template`	It is the standard social-post layout. The guidelines say "No feed, no audience" and "Kept note: one note, never a feed". Production's own answer is `AnswerSlip`: a torn paper slip with a stacked shadow, the words first, and a quiet reply trace.	A torn slip. The words come first (lead, then preview, then photo), then a signature line (face, name or Anónima, section and time), then «Responder · 2 respuestas» as a plain action with no rule. New replies are a folded corner plus «1 nueva» in terracotta. Every required piece stays.
T13	**Reviewer chrome inside the phone**: a dark «Foto de muestra» pill on every photo, the orange «TAB BAR: STAND-IN» tag, ember dotted underlines on every proposed line, and the dashed «Reproducción simulada» box.	`t13-reviewer-chrome`, `t13-sample-tag`	These make the screen look like a mock and pull the eye first.	Still labelled, but quieter: • «Foto de muestra» becomes a small paper caption in metadata ink. • The tab-bar stand-in note moves to the caption under the phone. • Proposed copy gets a 1 px dotted rule-coloured underline (the toggle and notes explain it). • The simulated notes become a quiet line.
T14	**A giant faint symbol watermark** in a pastel-blue circle header.	`t14-watermark-header`	An oversized faded icon in a corner is a stock hero decoration. The blue is a cool tint the guidelines rule out.	The header is the area's own paper, with the real art object at the right. Stage circles get their circle paper and grain.
T15	**Initial discs** for every author: one sand circle with a letter.	`t12-feed-template`	A generic avatar placeholder.	Production's `Face` tints (`FACE_TINT_COLOR` c1–c6, picked per name) with its warm 12 % ring. Anónima keeps its own mark.
T16	**A notification-style pill** «1 nueva» with a dot.	`t16-new-badge`	The stock unread badge.	A folded corner on the slip (the guidelines' "kept note… folded corner") and «1 nueva» in terracotta text (6.18:1).
T17	**Blurred drop shadows** under the audio cover, the mini player and the toast.	`t18-blur-shadow`	A soft blurred shadow is the default "elevation". The guidelines ask for "soft stacked shadows (two faint offset copies, no blur)".	Stacked, unblurred offset shadows on the paper pieces (the cover, slips, the mini player).
T18	**Outlined circle icon buttons** on light screens (back and save in a 1 px #8E8174 ring on white).	`t03-standin-icons-ex`	A UI-kit control. Production's back is a bare glyph in a 44 pt target.	A bare Ionicons glyph in a 44 px target. The ring is kept only on the band, where the button sits on art.

Checked and kept (not tells)

- **Forest primary buttons with cream text.** The owner asked for these, and they are production's `buttonForest`.
- **Pill buttons and chips.** The guidelines' shape language is "near-square cards and full pills". The contrast between the two is the point, so pills stay for things you press. What changes is that cards stop being the default container.
- **Fraunces 600 for titles; Instrument Sans for everything structural.** These are the production fonts. Production's `scale.ts` says "No italics anywhere", so no italic cut was added.
- **The torn edge under the band.** It is the brand's own paper language. It now gets a second, offset sheet.
- **Explorar's audio covers, Alejandra's photo, the film stills and the workshop plates.** These are already specific, real or composed from the app's paper (IMAGERY.md).

Not fixed here, on purpose


- **Ember as the forward colour.** The guidelines say "ember for the one thing to do next". The owner asked for forest primary actions, so forest stays. Ember appears only as the tab's active glyph, the live dot and the focus ring, and terracotta text is used for section links and «1 nueva».
- **The guidelines' Fraunces italic voice** contradicts `scale.ts` ("No italics anywhere"). The code is newer, so Elara's lines use upright Fraunces (the `voice` role).

What happened to each tell

The revision is recorded in `SHARED-SYSTEM.md`, under "Authored pass". After this audit, the owner narrowed the scope: a focused refinement, with no restyling of the type system. So the answers for T9 (one uppercase role: the paper label) and T11 (production's four-size scale and 24 pt margins) were **not applied**. They stay listed as remaining weaknesses. Every other tell was addressed.


Same app? The first screen of each tab

Before (shared system v1)

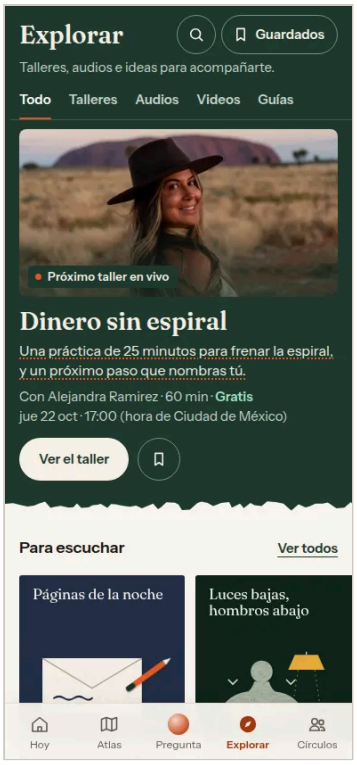



After (authored pass)

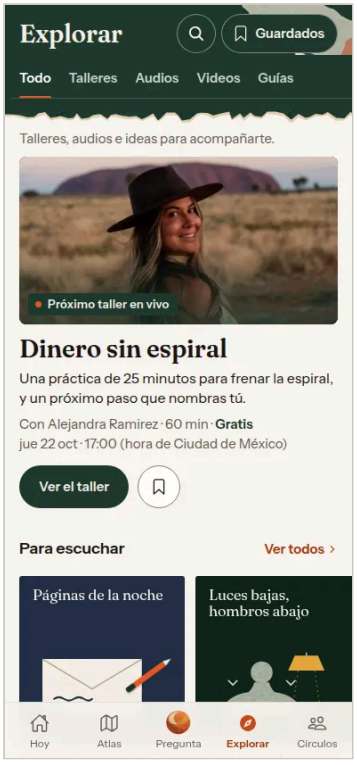





On the left, the Explorar overview; on the right, Mis círculos. 390 × 844. On this page only, Círculos' simulated device insets are set to 0 (its own review hooks), so the two bands compare like for like: they are now the same height. In Explorar the featured workshop is on the page now, not in the band.

Explorar · overview

Before · 390

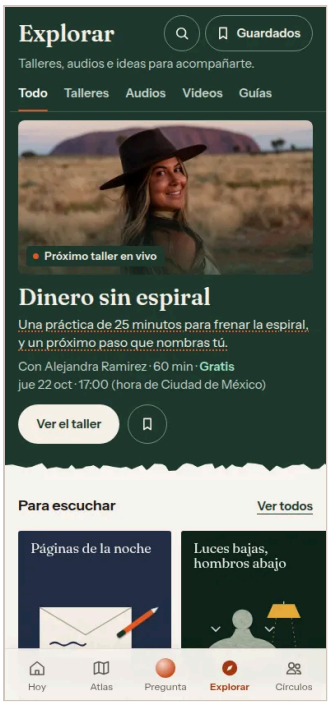

After · 390

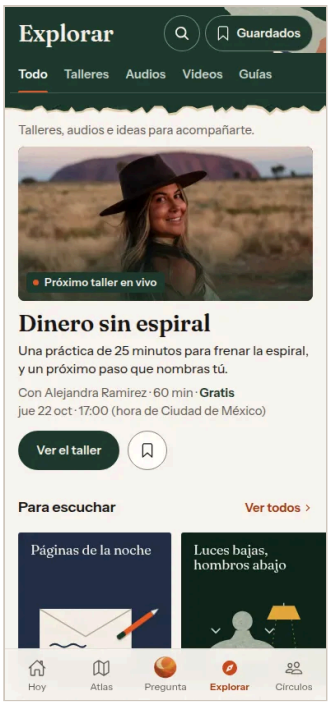

Before · 390, large text



After · 390, large text



Before · 320



After · 320



Before · 320, large



After · 320, large



- The band is thin: title, actions, sub-tabs, torn edge. The featured workshop moved onto the page just below the edge, with its photo, title, takeaway, time, «Ver el taller» and save.
- The band is forest paper (the app's fibre), with the header paper tucked into the title row; band buttons are solid forest on it.
- Real Ionicons; the paper orb; «Ver todos» is SectionHeading's terracotta link with a chevron, not underlined.
- Proposed-copy underlines are hidden until «Mostrar notas de revisión». Covers and type are unchanged.

Browser renders (headless Chromium), not phone screenshots. Large text: Explorar 140 %, Círculos 1.6 with production caps. Círculos shows its simulated status area and home indicator. Sample data. Review annotations off (the default).

Círculos · Mis círculos

Before · 390



After · 390



Before · 390, large text



After · 390, large text



Before · 320



After · 320



Before · 320, large



After · 320, large



- Circles are rows with a small crop of their area's own art; no bordered cards, no accent edge, no chevrons.
- Conversations are torn slips (production TornPaper): the opening sentence and a two-line preview, author and time on one line, a 76 px photo thumbnail that opens large, «Responder · N respuestas» in one footer line.
- New replies: a folded corner and «1 nueva» in terracotta text, not a badge.

Browser renders (headless Chromium), not phone screenshots. Large text: Explorar 140 %, Círculos 1.6 with production caps. Círculos shows its simulated status area and home indicator. Sample data. Review annotations off (the default).

Círculos · Descubrir, first visit


Before · 390




After · 390



Before · 390, large text

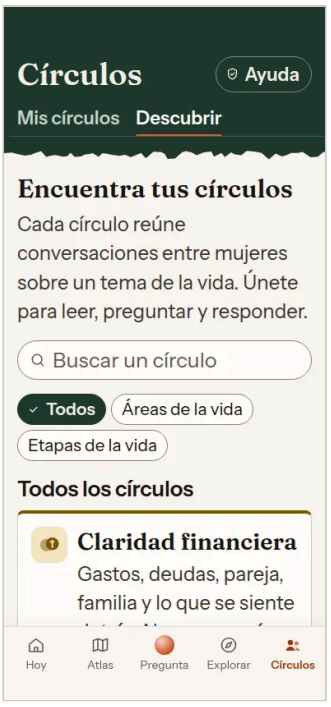

After · 390, large text

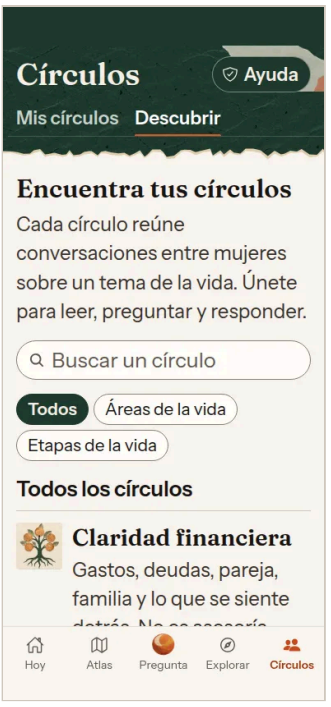

Before · 320



After · 320



Before · 320, large



After · 320, large




- Circle cards became ruled rows: art crop (or the circle paper and initial for stage circles), the Fraunces name, the catalogue line, then «Unirme».
- Filter chips without the check mark.

Browser renders (headless Chromium), not phone screenshots. Large text: Explorar 140 %, Círculos 1.6 with production caps. Círculos shows its simulated status area and home indicator. Sample data. Review annotations off (the default).

Círculos · a circle feed


Before · 390

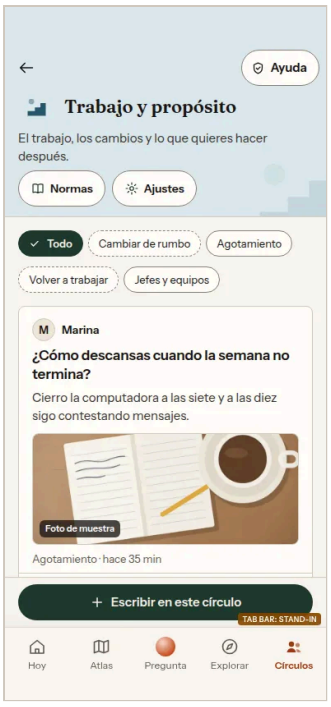

After · 390




Before · 390, large text

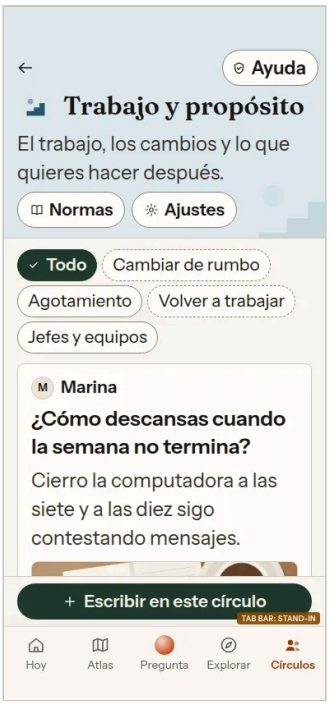

After · 390, large text




Before · 320

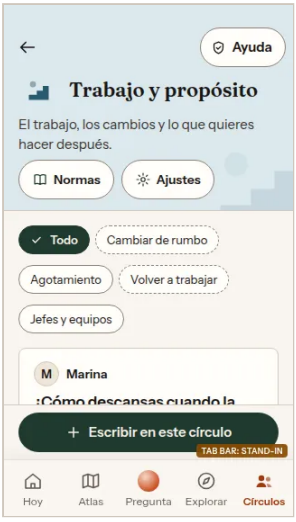

After · 320



Before · 320, large

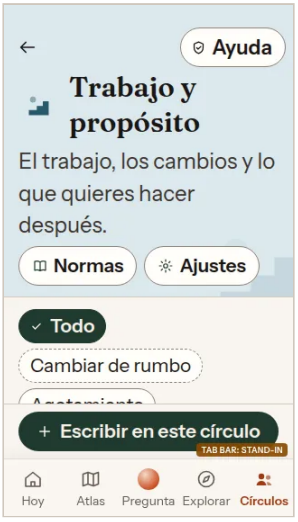

After · 320, large




- The header is the area's own paper with the art crop beside the name (52 px), not a pastel tint with a watermark symbol.
- «Normas» and «Ajustes» use the production glyphs (document-text, options); section chips have no check; quiet sections keep a solid edge.
- Slips as on Mis círculos.


Browser renders (headless Chromium), not phone screenshots. Large text: Explorar 140 %, Círculos 1.6 with production caps. Círculos shows its simulated status area and home indicator. Sample data. Review annotations off (the default).

Círculos · composer


Before · 390

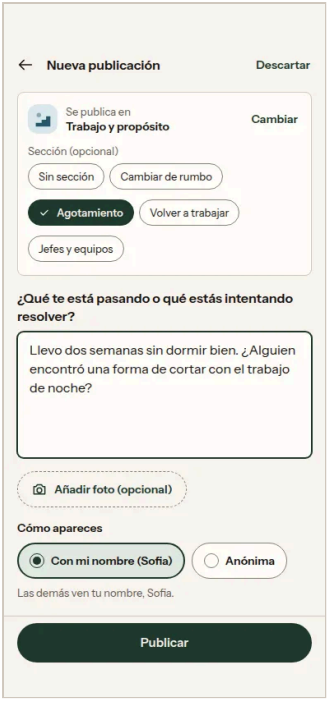


After · 390

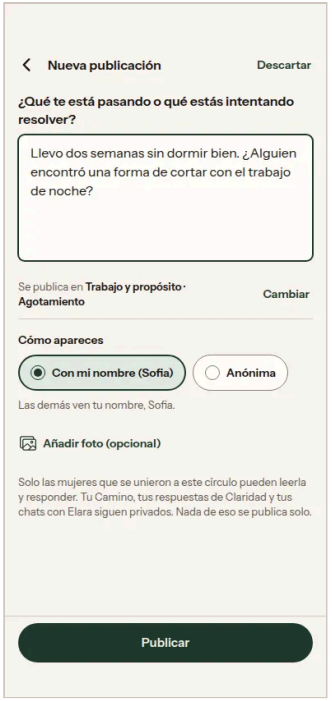


Before · 390, large text

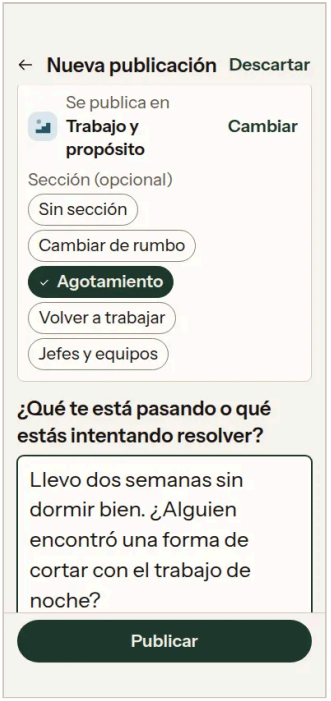


After · 390, large text

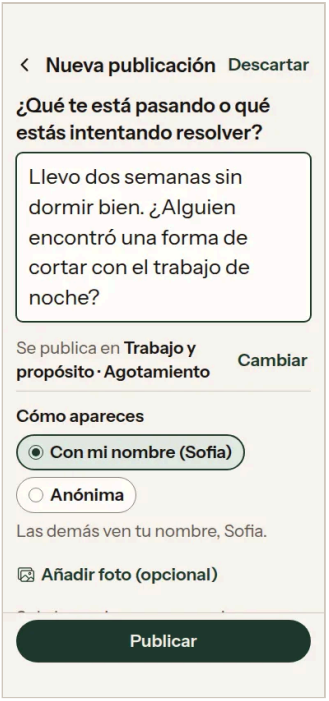


Before · 320

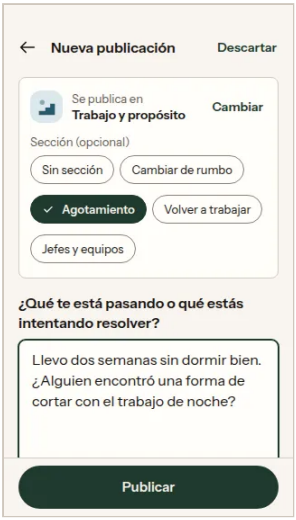


After · 320

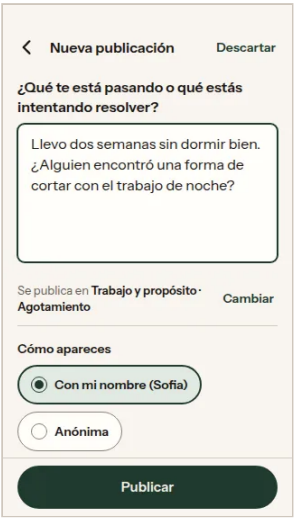

Before · 320, large

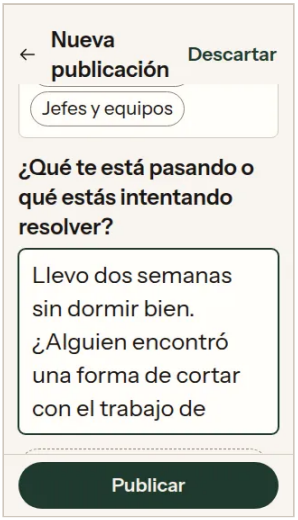

After · 320, large

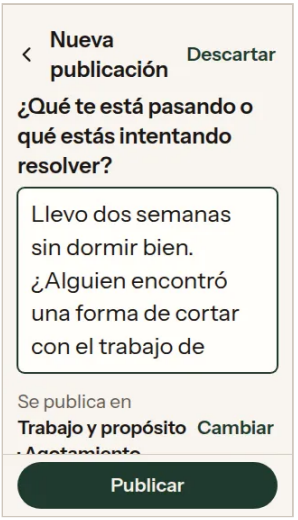

- The prompt and the text field come first.
- The destination is one line: «Se publica en Trabajo y propósito · Agotamiento · Cambiar»; «Cambiar» opens the circle row and the section chips.
- «Cómo apareces» and the optional photo follow the text; «Publicar» stays the one forest button. Drafts, discard, the guard and the photo states are unchanged.

Browser renders (headless Chromium), not phone screenshots. Large text: Explorar 140 %, Círculos 1.6 with production caps. Círculos shows its simulated status area and home indicator. Sample data. Review annotations off (the default).

Shared tokens and components (v2, rendered live from `elara-shared.css`)

In these print specimens the paper grain is left out: Chromium's PDF output renders its soft-light blend as grey. The screen captures show the real grain.

#1F3A2E
--el-band / --el-forest
Band, primary, selected

#F9F5EF
--el-page
Page (flat canvas)

#FCF8F1
--el-sheet
Torn slips (new)

#E2CFAF
--el-under
Sheet under the tear (new)

#F3E0CD
--el-seal
Folded corner (new)

#A13A12
--el-link
Section links (new role)

#C94A1C
--el-terra
Active tab glyph (new role)

#635A54
--el-meta
Metadata



Band: #1F3A2E with the app's paper fibre (soft-light, so the colour stays the token). The header paper sits in the 56 px title row, never behind the sub-tabs. Band buttons are solid forest (10.98:1 on any paper).

Torn edge: the same seeded path as v1, plus a second sheet (Under #E2CFAF) a little above it.

Section heading: the type is unchanged (18/24, 600). **Link:** production SectionHeading: terracotta text #A13A12 (6.18:1) with a chevron, no underline.

Slip: words on torn paper: Sheet #FCF8F1 with the grain, a seeded torn top and bottom, and one 3 px shadow copy with no blur (TornPaper). The **folded corner** (Seal #F3E0CD) marks new replies.

Quiet note and **«Foto de muestra»** caption: review annotations, shown only with «Mostrar notas de revisión».



Chip: selected is a forest fill with cream 600 text and no check mark; still 32 px inside a 44 px target.


Buttons: unchanged (forest primary, outline secondary).

Circle identity: the six life areas use crops of `path-area-*-v2.png`. The five stage circles use production's circle papers (`PAPER_TINT`) with the grain and a Fraunces initial. There are no accent inks.

Tab bar: Ionicons home, map, compass and people (outline at rest, filled and #C94A1C when active), and the paper orb `ask-elara-paper-orb-v1.png` at 28 px, as production's TabBar.tsx.

The Ionicons in use (from `Ionicons.ttf`)

home-outline · home · map-outline · compass-outline · compass · people-outline · people · search · bookmark-outline

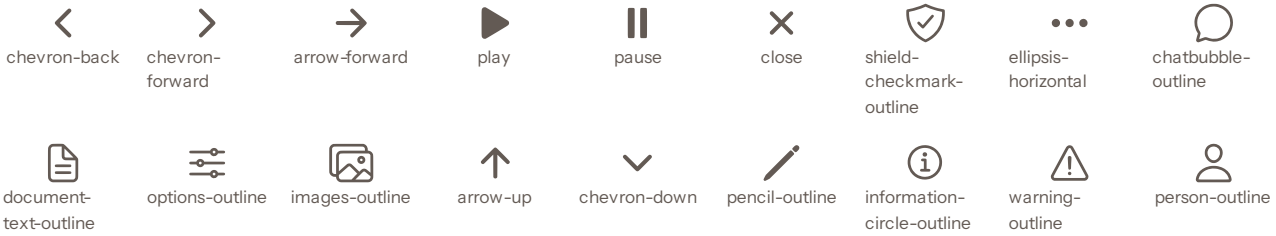
chevron-back
chevron-forward
arrow-forward
play
pause
close
shield-checkmark-outline
ellipsis-horizontal
chatbubble-outline
document-text-outline
options-outline
images-outline
arrow-up
chevron-down
pencil-outline
information-circle-outline
warning-outline
person-outline

Authored pass: real assets used

Asset (source)	Output (each `artifact/assets/el/`)	Used for
`apps/mobile/assets/images/daily-path-paper-stone-v1.png`, centre of the disc, high-passed and made seamless	`el-grain.webp` 256 px, 7.5 KB	Band, torn-edge strip, slips, circle papers, Explorar's paper tiles and date tiles
`explore-header-paper-v2.png` (unused in production code), its opaque corner	`el-band-paper.webp` 300 px, 10.9 KB	The top corner of both bands' title row
`ask-elara-paper-orb-v1.png`	`el-orb.webp` 84 px, 4.4 KB	Pregunta in both tab bars
`path-area-{money,love,purpose,self,energy,everyday}-v2.png`, square crops of the object	`area-{money,love,work,self,health,family}.webp` 200 px, 4–7.5 KB each (Círculos only)	Life-area circles. Map: Claridad financiera → money, Amor y relaciones → love, Trabajo y propósito → purpose, Confianza en ti → self, Salud y energía → energy, Familia → everyday. The public-circles migration is not on this branch, so the given map was used.
`circles/tokens.ts` `PAPER_TINT` (peach, sand, sage, stone, paper)	CSS	Stage circles: • college → stone; • job → sand; • baby → peach; • divorce → paper; • care → sage.
`circles/tokens.ts` `FACE_TINT_COLOR` c1–c6 and its ring	CSS	Author faces
`@expo/vector-icons` `Ionicons.ttf` and `glyphmaps/Ionicons.json` (offline in `/home/user/elara/node_modules`)	33 outlines as SVG paths in `ELARA ICONS v2`	The glyphs `Icon.tsx` resolves: • tabs: home-2, map, compass, users-group-two-rounded; • back: alt-arrow-left → chevron-back; • search: magnifer → search; • save: bookmark-linear and bookmark-bold; • Ayuda: shield-check → shield-checkmark-outline; • more: menu-dots → ellipsis-horizontal; • reply: chat-round-line → chatbubble-outline (`AnswerSlip`); • Normas: document-text-outline (`RoomMenuSheet`); • Ajustes: tuning-square → options-outline; • photo: gallery-wide → images-outline; • send: arrow-up-bold → arrow-up (`SendButton`); • compose: pen-linear → pencil-outline (`circle.tsx`); • also play, pause, close, chevron-forward, arrow-forward, chevron-down, information-circle-outline, warning-outline, close-circle, checkmark, checkmark-circle, person-outline (Anónima).

Asset (source)	Output (each `artifact/assets/el/`)	Used for
Brand guidelines (`Elara-Brand-Guidelines.pdf`, Oct 2026)	–	Paper language (torn, layered, stacked shadows with no blur, kept-note folded corner), paper ladder (Sheet, Under, Seal), "no third accent", "rows stay plain", Ionicons rule, the orb rule
Production `system/TornPaper.tsx`, `system/SectionHeading.tsx`	–	The slip and the section link

Authored pass: what changed

#	Tell (AI-TELLS.md)	Change	Where
A1	T1 flat palette	The band and the torn-edge strip are forest paper: the app's fibre (cut from `daily-path-paper-stone-v1.png`), laid with soft-light so the colour stays #1F3A2E. The header paper (`explore-header-paper-v2.png`) is tucked into the 56 px title row, so it never sits behind the sub-tabs. The torn edge has a second sheet (Under #E2CFAF) just above the page. The page stays a flat canvas, as production's.	shared `.el-band`, `.el-band-paper`, `.el-tear`, `EL_TEAR`
A2	Owner: header height	The band holds only the title, actions, sub-tabs, a 14 px foot and the torn edge, in both tabs. Explorar's featured workshop (photo, title, takeaway, time, «Ver el taller», save) and the tab's one-line lead moved onto the page under the edge. The feature now uses the light primary (forest with cream).	Explorar `homeView`, `.feat*`
A3	T2 CSS orb	The real paper orb (`ask-elara-paper-orb-v1.png`, 84 px webp) at 28 px, as `TabBar.tsx`.	shared `.el-orb`
A4	T3 stand-in icons	Real Ionicons outlines from `@expo/vector-icons` `Ionicons.ttf`, inlined as SVG paths. Each is the glyph `Icon.tsx` maps for the production screen (list below). The tab glyphs are 22 px, outline at rest and filled in #C94A1C when active, as `TabBar.tsx`.	`ELARA ICONS v2`, `I` in both
A5	T4, T5, T14 symbols, accent edges, watermark	The 11 accents and drawn medallions are gone. The six life-area circles use a crop of their area's own art (`path-area-*-v2.png`): 44 px shortcut, 56 px Descubrir row, 52 px header, 20 px tag. The five stage circles use production's circle papers (`circles/tokens.ts` `PAPER_TINT`) with the grain and a Fraunces initial. The circle header is that paper, with no tint or watermark. The guide rows lose the amber bar.	Círculos `PAPER`, `med()`; Explorar `.gur`
A6	T6 cards everywhere	The shortcuts and the Descubrir circle cards are rows with a rule, with no border, accent edge or chevron. The composer's place card is now a one-line ruled block (A9). Posts are torn slips (A8). The price box, «Continuar escuchando», the join card and the sheets stay cards.	Círculos CSS
A7	T7 check in the chip	Removed from the filter chips (search format, Descubrir, section and composer section). Selected is a forest fill with 600 cream text. Choice chips that are checkboxes (interests) keep their check.	shared `.el-chip`; JS
A8	T12, T15, T16 feed template	Posts are torn slips (production `TornPaper`: a seeded tear and one 3 px shadow copy with no blur). Each slip shows: · the opening sentence (2 lines) and a 2-line preview; · author (or Anónima) with section and time on one line, with production `Face` tints; · a 76 px photo thumbnail beside the text, which opens large on tap; · «Responder · N respuestas» on one footer line, with no rule; · for new replies, a folded corner (Seal #F3E0CD) and «1 nueva» in terracotta text. The post screen sets the post on a slip.	Círculos `postCard`, `.pcard`, `.el-slip`, `.el-fold`
A9	Owner: composer order	The prompt and the field come first. The destination is one line, «Se publica en Trabajo y propósito · Agotamiento · Cambiar». «Cambiar» opens the circle row (which opens the picker) and the section chips. «Cómo apareces» and the optional photo come after the text. «Publicar» is unchanged, and so are the drafts, discard, the submit guard, the client key and the photo states.	`screenCompose`, action `toggleDest`
A10	T8 underlined links	«Ver todos», «Descubrir más círculos» and «Editar» are production `SectionHeading` links: terracotta text #A13A12 (6.18:1) with a 12 px chevron, no underline.	shared `.el-more`
A11	T10, T13, owner: annotations	A switch outside the phone, «Mostrar notas de revisión», is off by default (`?notes=1` turns it on). It hides and shows: the proposed-copy dotted underline, the simulated playback, reservation and video notes, «Perfil de muestra», «Foto de muestra» (now a small paper caption), «Tab bar: stand-in» and the keyboard label. Dashed borders are gone: quiet notes use the info glyph, «Sin video todavía» is a paper tile, quiet section chips keep a solid edge with metadata ink, and «Añadir foto» is a text action. The honest product lines stay visible: «Reserva simulada», «Reproductor simulado», «Voz sintética», «Contenido de muestra», «Elara todavía no tiene audiolibros».	shared `.el-rv-off` `.el-rvmark`, `.el-note`, `.el-sample`
A12	T17, T18	Covers, the mini player and the toast use stacked shadow copies, with no blur. Light-screen back and save are bare glyphs in 44 px targets; on the band they keep the ring.	Explorar CSS

Unchanged, as asked:

- type roles and sizes, and both font families;
- the audio covers, photos, film stills and plates;
- the band, sub-tabs, torn-edge path and tab-bar metrics;
- forest primary buttons;
- all flows, copy and data.

Authored pass: checks

Explorar (`tools/checks.cjs` and `analyze.py`; `checks.json` regenerated):

- flows **168/168** (42 steps × 4: one new step, below);
- layout: hscroll, clipping, targets and bottom clearance **52/52** each;
- AA **2 840/2 840**: lowest over a cover 4.73, lowest flat 4.82. The count went from 2 860 because the hidden notes are not measured;
- time zones 6/6, focus 3 px, reduced motion;
- the standalone loads from `file://` (4 images, 0 broken, fonts). `tools/build-from-artifact.py` now also inlines the `assets/el/` CSS images.

Círculos (`tools/checks.cjs`, 6 configurations, 330 audits; `checks.json` regenerated):

- assertions **396/396**;
- 0 horizontal scroll, 0 clipped, 0 targets under 44, 0 contrast failures;
- «Publicar» 60/60, reply with the keyboard 6/6, «Ocultar teclado» 24/24, 0 page errors;
- designed truncations 140 (was 29): the slips now clamp the opening sentence and the preview to two lines each, on purpose.

Check changes:

- No selector changed. The markup kept `.pcard`, `.pcHit`, `.photoBtn`, `.newMark`, `.ccBody`, `.short`, `.feat`, `.btn-p`, `.chg`, `.still-ph` and `data-act`.
- One step was added to each suite: "review annotations hidden by default; «Mostrar notas de revisión» shows them". In Explorar it checks the `.chg` decoration; in Círculos, the `.sampleTag` and `.tabTag` visibility. Both turn the switch on, then off again.
- No other step needed the switch: the copy-toggle step reads text, not the underline.

First viewport, Explorar (CSS px; the reviewer bar ends at 45):

Viewport	«Ver el taller»	«Para escuchar»	Covers above the tab bar
390 × 844	561–609 (was 529–577)	633	96 px (was 98)
390 × 844, 140 %	790–838: below the tab bar (781); was visible	below	0
390 × 667 and 320 × 568	below the fold (was visible)	below	0

Moving the feature onto the page added the band foot, the edge and the lead line above the photo. On the smaller viewports «Ver el taller» is now one short scroll away. The photo and title are still in the first view everywhere.

Authored pass: logo-removed test

Question: "if the Elara mark were removed, would this still be unmistakably Elara, and not a generic AI-made wellness app?" I looked at the after captures at 390 and 320, normal and large.

Screen	Before	After	Why
Explorar overview	Borderline	**Yes**	Forest paper band with the header paper, the paper orb, Alejandra's real photo, the cut-paper cover family and real Ionicons.
Mis círculos	No	**Yes**	The circles carry their own paper art. Conversations are torn slips with a folded corner. No medallions, no pastel accents, no social-card template.
Descubrir, first visit	No	**Mostly**	Four of the first rows are life-area art. The stage circles (paper and an initial) are honest but plainer.
Circle feed	No	**Yes**	The header is the area's paper with its art, and the slips.
Composer	No	**No, still generic**	It is a form: prompt, field, chips, pill. The order is better and it carries no fake decoration, but nothing in it is Elara's own. Production has `system/PaperField.tsx`; using it was outside this narrowed scope.

Fixed after the first look: at 320 px the header paper sat behind «Descubrir» and «Videos». It is now confined to the title row.

Authored pass: remaining weaknesses

- **The composer** still reads as a generic form (see the test above). The next step would be production's `PaperField` for the text and a paper slip for the destination line.
- **Section headings** are still Instrument 600 18 and still look alike (T11). The paper label I planned was not applied because the owner froze the type. The same goes for:
  - the uppercase fact labels and eyebrows (T9);
  - the 16 px margins, against production's 24 (T11).
- **Stage circles** have a paper and an initial only. No art exists for them, and none was invented.
- **Explorar's first viewport:** «Ver el taller» is below the fold at 390 × 667, at 320 and with large text (see checks).
- **The slips are subtle.** Sheet #FCF8F1 on page #F9F5EF relies on the tear and the 3 px shadow copy. On a low-contrast phone screen they may read as plain text blocks. That needs a device check.
- **The header paper** is a crop of an asset production does not use. It needs the owner's or illustrator's approval.
- **Ember as forward:** the brand guidelines say "ember for the one thing to do next". Primary stays forest, as the owner asked.
- **The guidelines' Fraunces italic voice** conflicts with `scale.ts` "No italics anywhere". It was left as it is.
- **Not checked:** browser renders only; no device, screen reader or 200 % text.

Authored pass: Explore handoff items now out of date

These are in `explore-refined-2026-10-21/handoff/index.html`, which was not edited. They are in addition to the unify-pass list below.

- **The band:** "Featured: next live workshop" and the overview screen show the feature inside the band. It is now on the page under the torn edge, with the light primary (forest with cream) and a light save button. The tab's lead line is on the page too.
- **Band ground:** a flat #0E261D or #1F3A2E. It is now #1F3A2E with the paper grain (`el-grain.webp`), the header paper in the title row (`el-band-paper.webp`), solid-forest band buttons, and a two-sheet torn edge.
- **Tab bar:** "tab bar from production" with stand-in glyphs and a gradient orb. It now uses the real Ionicons, 22 px, active #C94A1C, and the paper orb image.
- **Guides:** "an amber rule, the title in Fraunces…". The amber rule is removed (`--amber` is no longer used by guide rows).
- **«Sin video todavía»:** "a dashed card". It is now a paper tile with sentence-case «Grabación de muestra».
- **«Ver todos»:** it was underlined. It is now terracotta #A13A12 with a chevron, no underline.
- **Proposed copy:** "underlined with dots" in ember. It is now hidden by default and shown with «Mostrar notas de revisión» as a faint dotted rule. The same applies to the simulated-playback, reservation and video notes and «Perfil de muestra».
- **Search format chips:** they had a check when selected. They now have none.
- **Icons:** every stand-in SVG is replaced by an Ionicons path, and back is `chevron-back` as a bare glyph.
- **Shadows:** the blurred cover and mini-player shadows are now stacked copies with no blur.
- **Acceptance:** "At 390×844 about 98 px of the first covers must show": it is now 96 px. «Ver el taller» is below the fold at 390 × 667 and 320 × 568. Flows are 168 (42 steps).
- **Screens:** all images in `handoff/img/` show the old band.